

## SWITCHMODE SERIES NPN POWER TRANSISTORS

... designed for use in high-voltage, high-speed, power switching regulators, converters, inverters, motor control system application.

### FEATURES:

\*Collector-Emitter Sustaining Voltage-

$$V_{CE(sus)} = 400 \text{ V (Min) -BUV48}$$

$$= 450 \text{ V (Min) -BUV48A}$$

\* Collector-Emitter Saturation Voltage -

$$V_{CE(sat)} = 1.5 \text{ V (Max.) @ } I_C = 10 \text{ A -BUV48}$$

$$I_C = 8 \text{ A -BUV48A}$$


\* Switching Time -  $t_f = 0.8 \text{ us (Max.) @ } I_C = 10 \text{ A -BUV48}$   
 $I_C = 8 \text{ A -BUV48A}$

**NPN**  
**BUV48**  
**BUV48A**


**15 AMPERE**  
**POWER**  
**TRANSISTORS**  
**400 - 450 VOLTS**  
**150 WATTS**

### MAXIMUM RATINGS

Characteristic	Symbol	BUV48	BUV48A	Unit
Collector-Emitter Voltage	$V_{CEO}$	400	450	V
Collector-Emitter Voltage ( $V_{BE} = -2.5V$ )	$V_{CEX}$	850	1000	V
Emitter-Base Voltage	$V_{EBO}$	7		V
Collector Current - Continuous	$I_C$	15		A
- Peak	$I_{CM}$	30		
Base current	$I_B$	4		A
Total Power Dissipation @ $T_C = 25^\circ C$	$P_D$	150		W
Derate above $25^\circ C$		1.0		W/ $^\circ C$
Operating and Storage Junction Temperature Range	$T_J, T_{STG}$	-65 to +175		$^\circ C$



**TO-247(3P)**




PIN 1.BASE  
 2.COLLECTOR  
 3.EMITTER

### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	1.0	$^\circ C/W$

DIM	MILLIMETERS	
	MIN	MAX
A	20.63	22.38
B	15.38	16.20
C	1.90	2.70
D	5.10	6.10
E	14.81	15.22
F	11.72	12.84
G	4.20	4.50
H	1.82	2.46
I	2.92	3.23
J	0.89	1.53
K	5.26	5.66
L	18.50	21.50
M	4.68	5.36
N	2.40	2.80
O	3.25	3.65
P	0.55	0.70

FIGURE -1 POWER DERATING

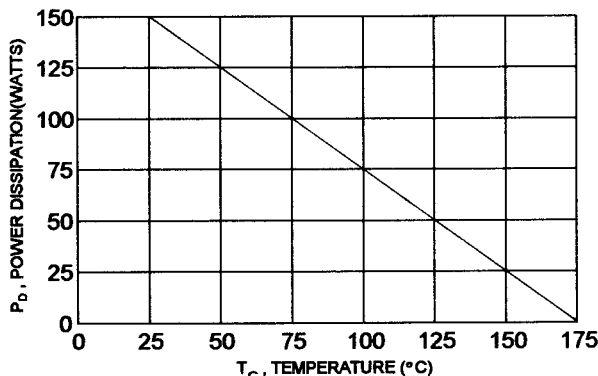

**ELECTRICAL CHARACTERISTICS (  $T_c = 25^\circ\text{C}$  unless otherwise noted )**

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

**OFF CHARACTERISTICS**

Collector - Emitter Sustaining Voltage (1) ( $I_c = 200\text{ mA}$ , $I_B = 0$ , $L = 25\text{ mH}$ ) BUV48 BUV48A	$V_{CEO(sus)}$	400 450		V
Collector Cutoff Current ( $V_{CE} = V_{CEX}$ , $V_{BE} = -2.5\text{ V}$ ) ( $V_{CE} = V_{CEX}$ , $V_{BE} = -2.5\text{ V}$ , $T_c = 125^\circ\text{C}$ )	$I_{CEX}$		0.2 2.0	mA
Collector Cutoff Current ( $V_{CE} = V_{CEX}$ , $R_{BE} < 10\text{ ohm}$ ) ( $V_{CE} = V_{CEX}$ , $R_{BE} < 10\text{ ohm}$ , $T_c = 125^\circ\text{C}$ )	$I_{CER}$		0.5 4.0	mA
Emitter Cutoff Current ( $V_{EB} = 5.0\text{ V}$ , $I_c = 0$ )	$I_{EBO}$		1.0	mA

**ON CHARACTERISTICS (1)**


Collector - Emitter Saturation Voltage ( $I_c = 10\text{ A}$ , $I_B = 2.0\text{ A}$ ) ( $I_c = 8.0\text{ A}$ , $I_B = 1.6\text{ A}$ ) ( $I_c = 15\text{ A}$ , $I_B = 3.0\text{ A}$ ) ( $I_c = 12\text{ A}$ , $I_B = 2.4\text{ A}$ ) BUV48 BUV48A BUV48 BUV48A	$V_{CE(sat)}$		1.5 1.5 5.0 5.0	V
Base - Emitter Saturation Voltage ( $I_c = 10\text{ A}$ , $I_B = 2.0\text{ A}$ ) ( $I_c = 8.0\text{ A}$ , $I_B = 1.6\text{ A}$ ) BUV48 BUV48A	$V_{BE(sat)}$		1.6 1.6	V

**SWITCHING CHARACTERISTICS**


Turn On Time	$I_c = 10\text{ A}$ , $I_{B1} = 2.0\text{ A}$ , $I_{B2} = -2.0\text{ A}$ BUV48 $V_{CC} = 150\text{ V}$ $I_c = 8\text{ A}$ , $I_{B1} = 1.6\text{ A}$ , $I_{B2} = -1.6\text{ A}$ BUV48A	$t_{on}$	1.0	us
Storage Time		$t_s$	3.0	us
Fall Time		$t_f$	0.8	us

(1) Pulse Test: Pulse width = 300, us , Duty Cycle  $\leq 2.0\%$


DC CURRENT GAIN

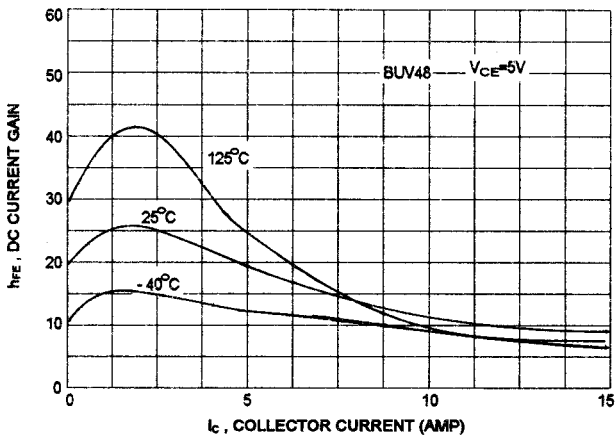


COLLECTOR SATURATION REGION

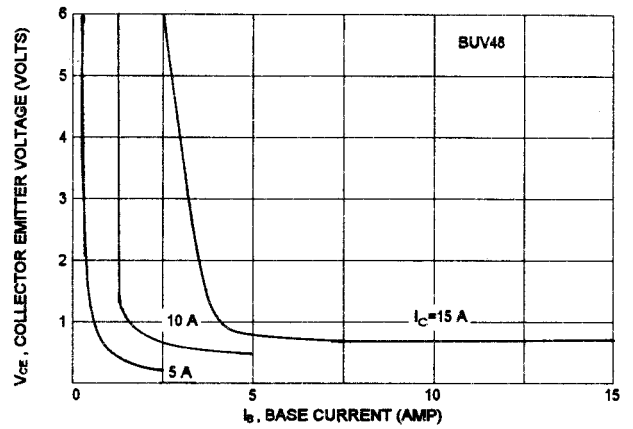


BASE-EMITTER SATURATION VOLTAGE

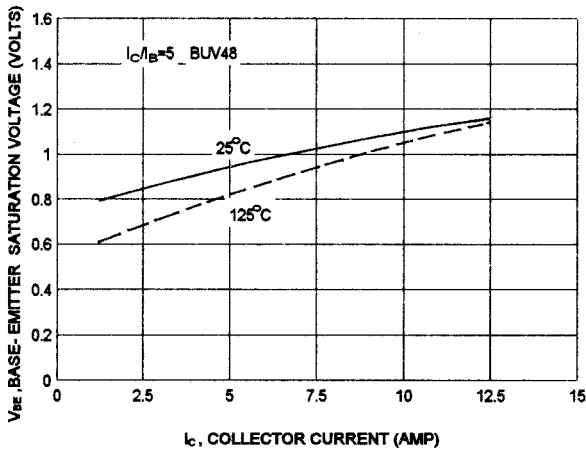

COLLECTOR-EMITTER SATURATION VOLTAGE

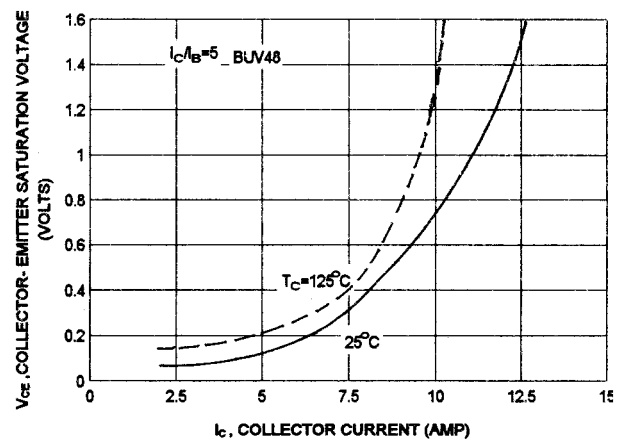

SWITCHING TIME

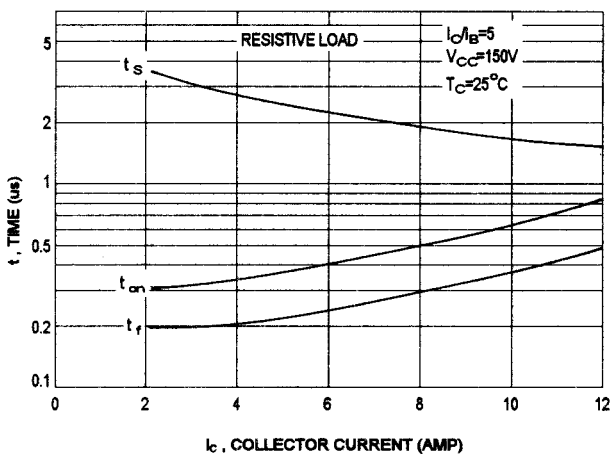

ACTIVE-REGION SAFE OPERATING AREA

